

Product Specification

10Gbps 300m SFP+ Transceiver

CLSFPP8510GSR

V20160818

Product Features

- Up to 10Gbps data links
- 300m with 50/125 μ m 2000MHz MMF
- 850nm VCSEL laser
- Duplex LC Connector
- Hot-pluggable SFP+ footprint
- Single 3.3V power supply
- Operating temperature: 0°C to 70°C
- RoHS
- Digital Diagnostic Monitor(DDM)
- Power Consumption < 0.8W



Applications

√ 10GBase-SR/SW 10G Ethernet

1. Product Description

The CLSFPP8510GSR is a 10Gbps enhanced small form factor pluggable SFP+ transceiver compatible with 10GBASE-SR/SW. It is suitable for multi-mode fiber (MMF) communications in 10Gbps Ethernet.

2. Regulatory Compliance

C-light transceivers are Class 1 Laser Products comply with FDA regulations. Meet Class 1 eye safety requirements of EN 60825 and the electrical safety requirements of EN 60950.

3. Absolute Maximum Ratings

Parameter	Symbol	Min.	Max.	Unit
Supply Voltage	V _{CC}	-0.5	4	V
Storage Temperature	T _s	-40	85	°C
Operating Case Temperature	T _c	0	70	°C

4. Recommended Operating Conditions

Parameter	Symbol	Min.	Typical	Max.	Unit
Operating Case Temperature	T _c	0		70	°C
Power Supply Voltage	V _{CC}	3.15	3.3	3.45	V
Power Supply Current	I _{CC}			200	mA
Data Rate			10		GBps
Max Link Length on 50/125μm 2000MHz MMF	L _{max}			300	m

5. Optical Characteristics

Parameter	Symbol	Min.	Typical	Max.	Unit
Transmitter					
Centre Wavelength	λ _c	840	850	860	nm
Spectral Width (RMS)	σ			0.5	nm
Average Output Power	P _{out}	-5		0	dBm
Extinction Ratio	ER	3.5			dB
Average Launch Power of Off Transmitter	P _{off}			-30	dBm
Receiver					
Centre Wavelength	λ _c	840	850	860	nm
Receiver Sensitivity	P _{IN}			-13	dBm
Receiver Overload	P _{max}	0.5			dBm
LOS De-Assert	LOS _D			-16	dBm
LOS Assert	LOS _A	-18			dBm
LOS Hysteresis		0.5			dB

6. Electrical Characteristics

Parameter	Symbol	Min.	Typical	Max.	Unit
Transmitter					
Input Differential Impedance	Zin	90	100	110	Ω
Data Input Swing Differential	Vin	200		700	mV
Tx-Dis Disable	Vd	2.0		Vcc	V
Tx-Dis Enable	Ven	0		0.8	V
Receiver					
Data Output Swing Differential	Vout	300		800	mV
Rx-Los Fault	Vlf	2.0		VccHOST	V
Rx-Los Normal	Vln	0		0+0.8	V
Output rise and fall time	Tr, Tf	28			ps

7. Pin Descriptions

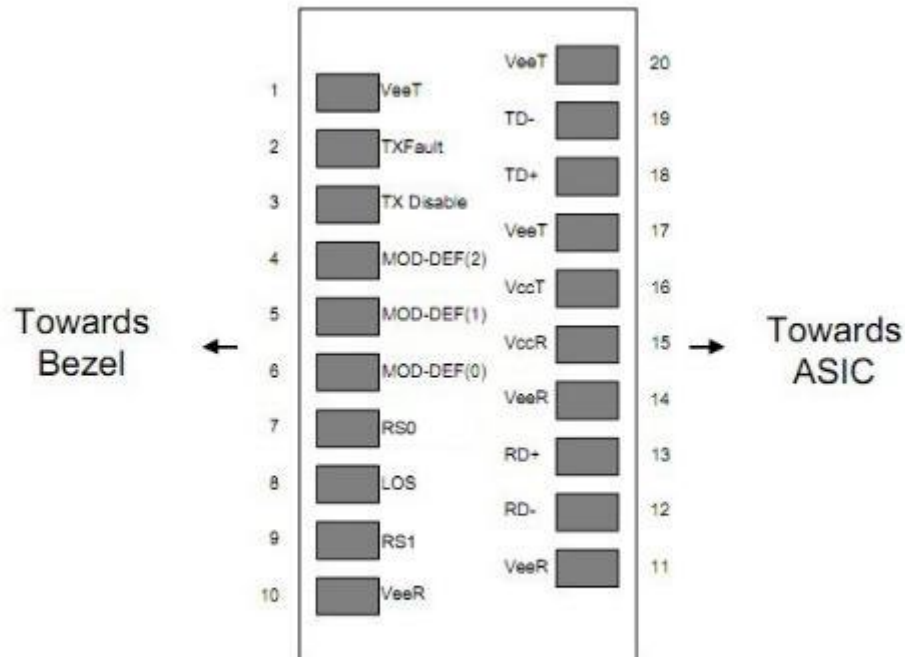


Diagram of Host Board Connector Block Pin Numbers and Names

Pin	Symbol	Description	Ref.
1	VEET	Transmitter Ground (Common with Receiver Ground)	7.1
2	TFAULT	Transmitter Fault. Not supported.	
3	TDIS	Transmitter Disable. Laser output disabled on high or open.	7.2
4	MOD_DEF(2)	Module Definition 2. Data line for Serial ID.	7.3
5	MOD_DEF(1)	Module Definition 1. Clock line for Serial ID.	7.3
6	MOD_DEF(0)	Module Definition 0. Grounded within the module.	7.3
7	RS0	Rate Select0, optionally controls SFP+ module receiver. When high input signaling rate > 4.25 GBd and when low input signaling rate < 4.25 GBd	
8	LOS	Loss of Signal indication. Logic 0 indicates normal operation.	7.4
9	RS1	Rate Select1, optionally controls SFP+ module receiver. When high input signaling rate > 4.25 GBd and when low input signaling rate < 4.25 GBd	
10	VEER	Receiver Ground (Common with Transmitter Ground)	7.1
11	VEER	Receiver Ground (Common with Transmitter Ground)	7.1
12	RD-	Receiver Inverted DATA out. AC Coupled.	
13	RD+	Receiver Non-inverted DATA out. AC Coupled.	
14	VEER	Receiver Ground (Common with Transmitter Ground)	7.1
15	VCCR	Receiver Power Supply	
16	VCCT	Transmitter Power Supply	
17	VEET	Transmitter Ground (Common with Receiver Ground)	7.1
18	TD+	Transmitter Non-Inverted DATA in. AC Coupled.	
19	TD-	Transmitter Inverted DATA in. AC Coupled.	
20	VEET	Transmitter Ground (Common with Receiver Ground)	7.1

Notes:

7.1 Circuit ground is internally isolated from chassis ground.

7.2 Laser output disabled on TDIS > 2.0V or open, enabled on TDIS < 0.8V.

7.3 Should be pulled up with 4.7k - 10kohms on host board to a voltage between 2.0V and 3.6V. MOD_DEF(0) pulls line low to indicate module is plugged in.

7.4 LOS is open collector output. Should be pulled up with 4.7k - 10kohms on host board to a voltage between 2.0V and 3.6V. Logic 0 indicates normal operation; logic

1 indicates loss of signal.

8. EEPROM & DDM THRESHOLD

8.1 EEPROM


2 wire address 1010000X (A0h)

0~95	Serial ID Defined by SFP MSA (96 bytes)
96~127	Vendor Specific (32 bytes)
128~255	Reserved (128 bytes)

8.1 DDM THRESHOLD

	Low Alarm	Low Warn	High Warn	High Alarm
Temperature	-5°C	0°C	70°C	75°C
Voltage	3V	3V	3.6V	3.7V
Tx Bias	4mA	5mA	10.8mA	11.8mA
Tx Power	-6dBm	-5dBm	-1dBm	0dBm
Rx Power	-16dBm	-14dBm	-1dBm	0dBm

9. Mechanical Specifications

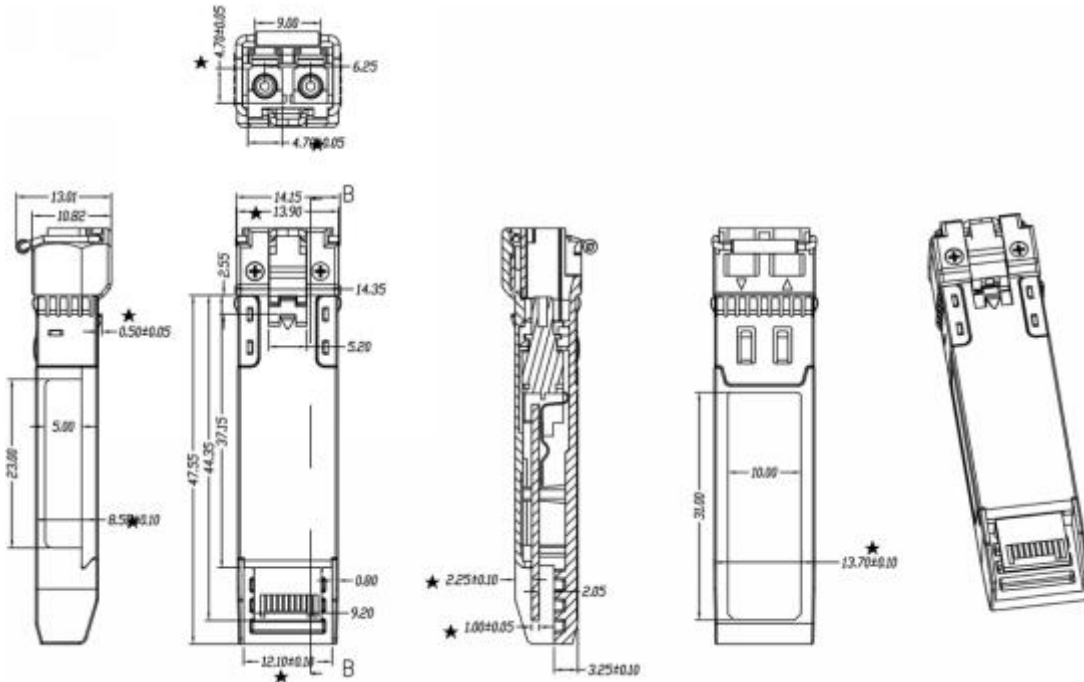

10. LABEL

C-LIGHT offers label OEM design and print.

Label barcode supports code128 and 2D barcode

SIZE: 1) Front 35mm*10.5mm 2)Back 26mm*10.5mm

C-LIGHT



Ordering Information

Part No.	Data Rate	DDM	Wave	Fiber Type	Dist.	Temp.	Optical Interface
CLSFP8510GSR	10Gbps	yes	850nm	MMF	300m	0~70°C	LC

VERSION UPDATE:

VERSION NO.	DATE	UPDATED INFORMATION
V20160818	20160818	1. EEPROM& DDM Threshold updated

		<ol style="list-style-type: none">2. "LABEL" added3. Ordering information updated4. Product picture updated
--	--	---

NOTICE:

C-LIGHT reserves the right to make changes to this product in this specification without notice, in order to improve product performance.

CONTACT:

Shenzhen C-Light network communication co., Ltd

4F East, Building 1, Shunheda Factory Plant, Liuxiandong industrial park,
Xili, Nanshan Dist, Shenzhen PR. China

Tel: 86-755-2778-9180 **Fax:** 86-755-2778-9174

E-mail: sales@c-light.com <http://www.c-light.com>