


SPECIFICATION/规格书

CONSTRUCTION & DIMENSION/结构 & 尺寸

Conductor/导体	Material/材质 :CCA(铜包铝)
	Size/规格 :24AWG*4P
	Construction/结构:1/0.5±0.008MM
Insulation/绝缘	Material/材质 :HDPE
	Avg. Thickness :0.20MM
	Min. Thickness :0.18MM
	Diameter/外径 :0.90±0.02MM
Inner Layer/ 芯线对绞	Direction/绞向 :S(右向)
	Pitch/绞距REF :30mm underneath
Outside Layer/ 成缆	Direction/绞向 :S(右向)
	Pitch/绞距REF :200mm underneath
Separate/隔离	Material/材质 : /
	Construction/结构: /
Shielding/屏蔽	Material/材质 : /
	Coverage/遮蔽率 : /
	Drain Wire/地线 : /
	Material/材质 : /
Braid/编织	Material/材质 : /
	Construction/结构: /
Filler/填充	Material/材质 :Nylon
Jacket/护套	Material :PVC
	Avg. Thickness :0.55MM
	Min. Thickness :0.50MM
	Diameter :5.0±0.3mm
	Color :Optional
Marking/印字	Optional
Packing/包装	Optional

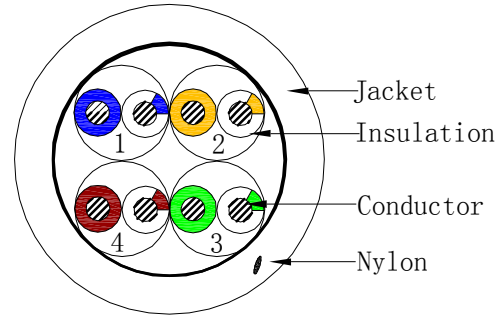

Insulation Color /绝缘颜色:

1. Blue&White/Blue
2. Orange&White/Orange
3. Green&White/Green
4. Brown&White/Brown

CROSS-SECTION/截面图

ELECTRICAL PROPERTIES/电气特性

Solid conductor resistance/单条导体电	: ≤24.5Ω/100M at 20℃
Rating Temperature/额定温度	: 60℃
Voltage Rating/额定电压	: 30V

Description:LAN CABLE CAT 5E UTP 1/0.50CCA 4P + Nylon PVC					
Customer :			Drawing NO. :N190221002		
Drawing	Owen	2019. 02. 21	UNIT:MM	REV. :A	PART NO. :
Checked					
Approved					



深圳市奥威尔通信科技有限公司
SHENZHEN OWIRE Communication Technology CO.,LTD