

Super-Speed USB 3.0



For Ultrabook/Tablets



Energy Saving



Windows 8.1 Compatible



Mac OS X Compatible

EU-4306


USB3.0 Gigabit Ethernet Adapter

With speeds up to 5Gbps, USB 3.0 is fast becoming the new standard in data-transfer technology for PCs and laptops. However, some computers only feature 10/100 Ethernet ports while Macbook Airs and often Ultrabooks don't feature Ethernet ports at all. Existing USB 2.0 Gigabit Ethernet adapters are limited by the USB 2.0 maximum data rate of 480Mbps while our USB 3.0 adapter can reach speeds of 5Mbps. Upgrade existing 10/100 Ethernet connectivity to super-fast Gigabit speeds or introduce USB 3.0 true Gigabit Ethernet connectivity to an Ultrabook or Macbook Air.

USB 3.0

The EU-4306 supports USB 3.0, the newest specification of the USB standard which specifies a maximum data transmission speed of 5Gbps. Up to ten times faster than the existing USB 2.0 standard which is restricted to a maximum speed of 480Mbps, USB 3.0 enables the full capacity of 10/100/1000Mbps Gigabit Ethernet to be reached through an existing USB port with no need to install a Gigabit Ethernet card.

USB 3.0 10X Faster

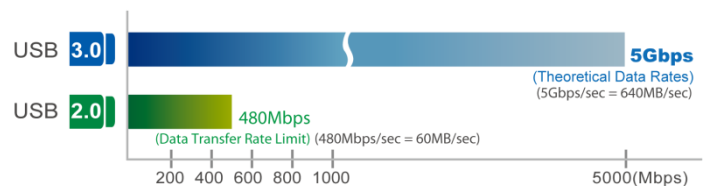

Ideal for Ultrabooks

For Ultrabooks or a Macbook Air with no Ethernet port, use the USB 3.0 Gigabit Ethernet adapter for simple plug-and-play Gigabit Ethernet network connection capability. Take the compact, portable EU-4306 wherever you take your laptop and ensure you stay connected to fast, reliable Gigabit Ethernet whenever you need. Provide Gigabit Ethernet connectivity for desktops, laptops, game consoles or home network appliances.



USB3.0 Gigabit Ethernet Adapter

EU-4306

Supports Jumbo Frames

Support for jumbo frames can offer dramatic improvements in network performance and raise effective bandwidth. Jumbo frame are Ethernet frames (data packets) of up to 4000 bytes per frame, in comparison with standard, significantly smaller 1500 byte Ethernet frames. Using larger frames means that fewer frames are sent across the network which improves CPU cycles and bandwidth. For some applications, especially those typical of Gigabit Ethernet use such as large file transfers, the result is greatly increased network performance.




Power Saving

The EU-4306 incorporates a power saving feature to reduce power consumption by up to 35% when there is no Ethernet activity, reducing costs and contributing to a better environment.



Windows 8.1 & Mac OS X 10.x

Full compatibility with Windows 8.1 and Mac OS X 10.x for hassle-free use with brand new Windows 8.1 and Mac OS X 10.x devices and future-proof peace of mind.

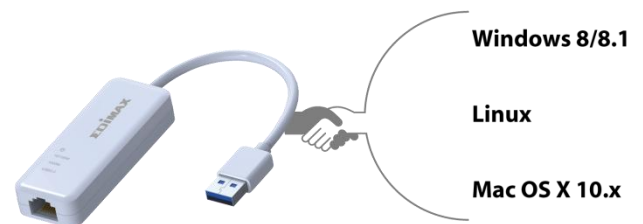

KEY FEATURES

- Compliant with USB 3.0, 2.0 & 1.1 specifications
- Supports USB Super/High/Full Speed
- Supports all USB 3.0 power saving models
- Supports Wake-on-LAN function
- Supports IEEE 802.3az (Energy Efficient Ethernet)
- Supports IEEE 802.1x flow control and 802.1Q VLAN
- Supports jumbo frames up to 4000 bytes
- Supports Window 2000/XP/Vista/7/8/8.1, Linux and Mac OS X 10.x


USB3.0 Gigabit Ethernet Adapter

EU-4306

TECHNICAL SPECIFICATIONS

| Hardware | Standards | Supported OS |
|---|--|--|
| <ul style="list-style-type: none"> ✿ 1 x USB 3.0 type A, male ✿ 1 x RJ-45 10/100/1000Mbps LAN port ✿ LED indicators: Power, 10/100M, 1000M, USB3.0 | <ul style="list-style-type: none"> ✿ IEEE 802.3 ✿ IEEE 802.3u ✿ IEEE 802.3ab ✿ IEEE 802.3az ✿ IEEE 802.1x/q | <ul style="list-style-type: none"> ✿ Windows XP/Vista/7/8 /8.1 ✿ Mac OS 10.6/10.7/10.8 ✿ Linux kernel 3.x/2.6.x |
| Power Consumption | Storage Temperature | Operating Temperature |
| <ul style="list-style-type: none"> ✿ 165mA @5.0VDC (USB Bus Powered) | <ul style="list-style-type: none"> ✿ -10-80°C | <ul style="list-style-type: none"> ✿ 0-40°C |
| Dimensions Weight | Weight | Certifications |
| <ul style="list-style-type: none"> ✿ 73.2 x 28 x 13.6 mm (L x W x H) | <ul style="list-style-type: none"> ✿ 23.5g | <ul style="list-style-type: none"> ✿ FCC, CE |

NETWORK DIAGRAM

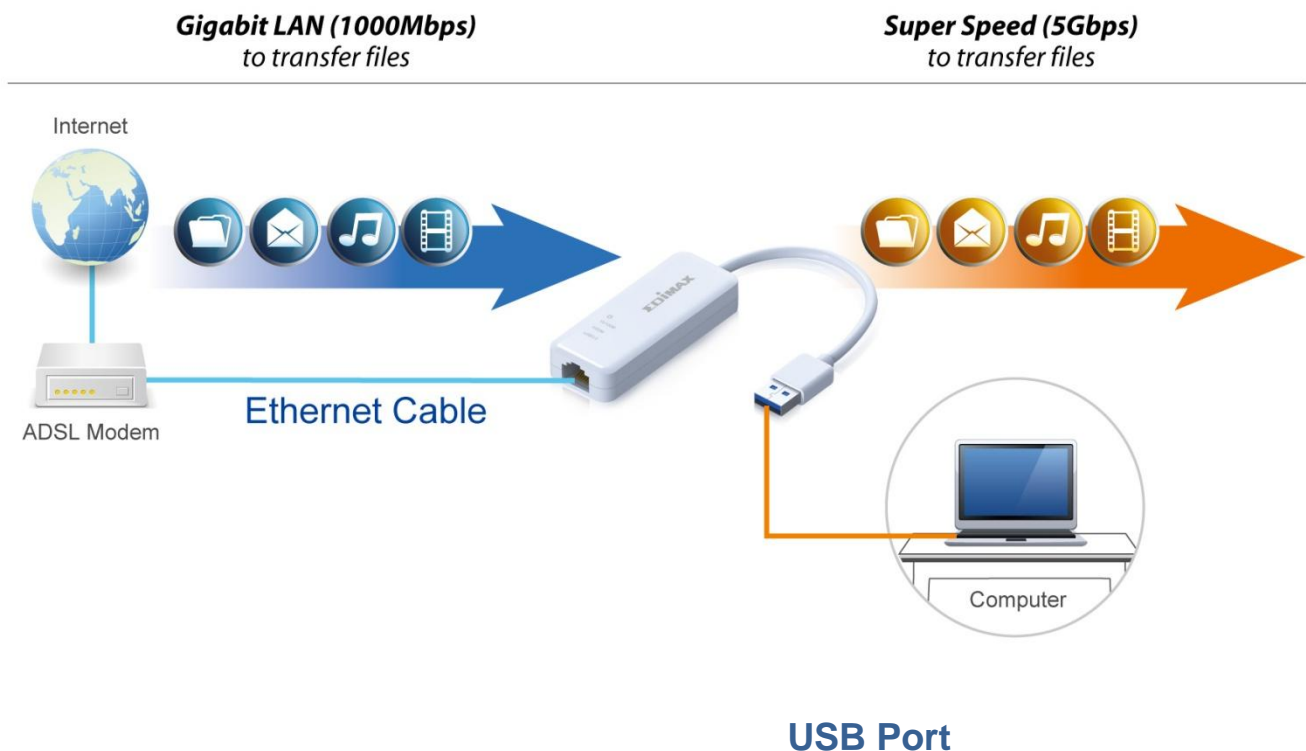

Maximum performance, actual data rates, and coverage will vary depending on network conditions and environmental factors. Product specifications and design are subject to change without notice. Copyright © 2014 Edimax Technology Co. Ltd. All rights reserved.