







## FB70-12

Unit:inch(mm)

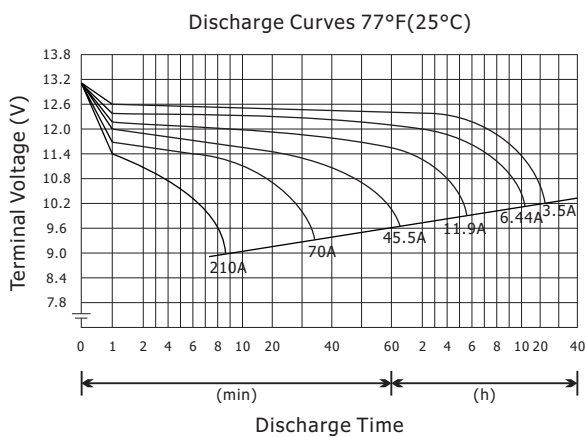

### ■ Discharge Current and Discharge Duration Time

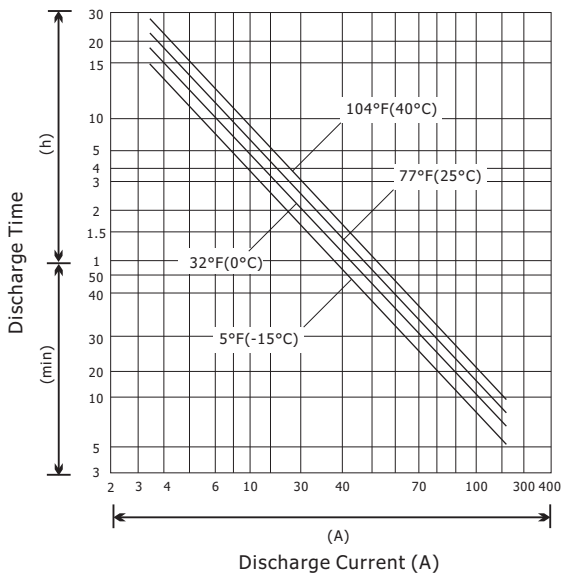

### ■ Specification

Nominal Voltage	12V	
Rated Capacity (20hr Rate)	70Ah	
Dimensions	Length	10.24inches(260mm)
	Width	6.65inches(169mm)
	Height	8.74inches(222mm)
	Total Height	8.74inches(222mm)
Weight	Approx. 47.36lbs (21.48kg)	

### ■ Characteristics

Capacity 77°F(25°C)	20hour rate (3.50A)	70.0Ah
	10hour rate (6.44)	64.4Ah
	5hour rate (11.9A)	59.5Ah
	1hour rate (45.5A)	45.5Ah
Internal Resistance	Full Charged, 77°F(25°C)	7mΩ
Capacity Affected By Temperature (10hr Rate)	104°F(40°C)	102%
	77°F(25°C)	100%
	32°F(0°C)	85%
	5°F(-15°C)	65%
Self-Discharge 77°F(25°C)	Capacity after 3 month storage	90%
	Capacity after 6 month storage	80%
	Capacity after 9 month storage	60%
Charge (Constant Voltage)	Initial Charge Current "LESS" than	21A
	Cycle	14.4-15.0V/77°F(25°C)
	Stand By	13.5-13.8V/77°F(25°C)

\*\*These data are average values obtained from three Charge/Discharge cycles. Note: These are NOT minimum values.