

F12

F12, a fingerprint reader with RS485 communication interface works with biometric access controllers and fingerprint standalone access control, including inBIO series controllers, F18 and so on. It offers the function of capturing and transferring fingerprint samples to access control panel. With its IP65 rated rugged structure, F12 offers extra durability in all weather conditions including outdoor environments.



Specifications

CPU

324MHz

Sensor

ZK small-sized sensor

Communication

RS485

Standard Function

ID Card Module

Optional Function

MF Card Module

Voice Prompt

Buzzer

Working Voltage

12VDC

Working Temperature

0°C ~ 45°C

Protection Grade

IP65



Size

Height: 102mm

Width: 50mm

Depth: 37mm

Configuration

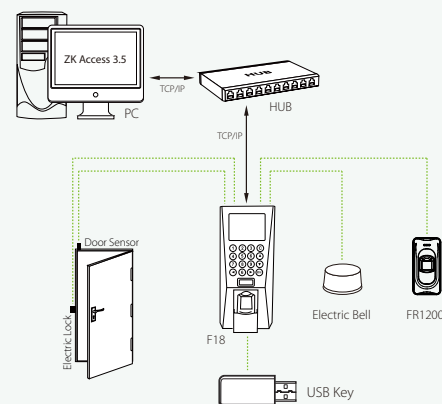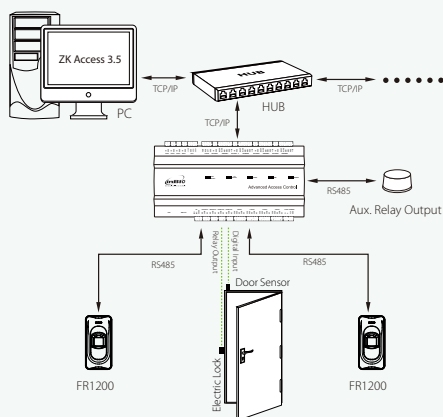

ZKTeco (PTY) Ltd

Tel: +27 12 259 1047

E-mail: sales@zkteco.co.za

www.zkteco.co.za

Global Offices:

USA: +1 732-412-6007

EU: +34 916532891

Brazil: +55 31 2515-8326

Thailand: +66-027199154

Mexico: +52-55-52928418

South Africa: +27 12 259 1047

Egypt: +201110444134

Dubai: +971 4 6091 310

India: +91 8123536788

Indonesia: +62 21 2921 8949

Vietnam: +84-0169-5813007

Philippines: +63 9084118832

Russia: +8 915 178-46-81