

# THE DATALINE SERIES

## GIGABIT FAST ETHERNET (12 PORT PROTECTOR)

12-00382

rev1

### Features

- All 8 lines protected
- Each pair supports 250Mbps/s
- Negligible insertion loss

Protects fast gigabit ethernet LAN equipment such as hubs, switches and network interface cards from induced lightning and electrostatic discharge.

Compatible to 100Base-T and 1000Base-T


Category 5e patch leads included.



\*Specifications subject to change without prior notice due to continuous improvements

Specifications	
Network/Dataline Surge Protection	
Max. Discharge Current (Fine L-L)	40A (8/20us)
Max. Discharge Current (Coarse L-E)	2.5kA (8/20us)
Residual Voltage	<5V (1.2/50us)
Technology Supported	Gigabit Cat5e
Data Speed Supported	>1000 MBit/s
Pairs Protected	1-2, 3-6, 4-5, 7-8

### Dimensions

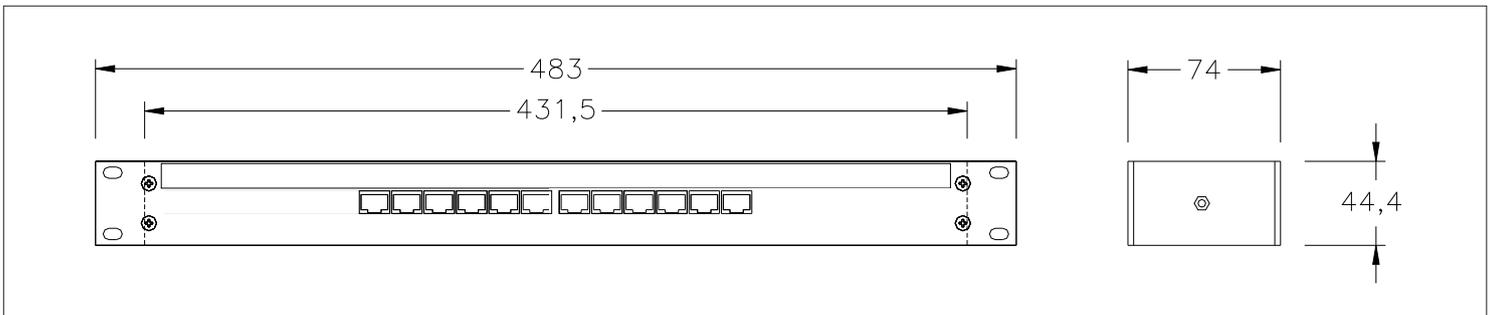

### Designed and Manufactured by:

#### Clearline Protection Systems (Pty) Ltd

385 Roan Crescent Corporate Park North, Old Pta Road,

Midrand, South Africa

P.O. Box 5985, Halfway House, 1685

Tel: +27 (0) 11 848-1100

Fax: +27 (0) 11 314-3880

E-mail: [info@clearline.co.za](mailto:info@clearline.co.za)

[www.clearline.co.za](http://www.clearline.co.za)

